


FIG.1

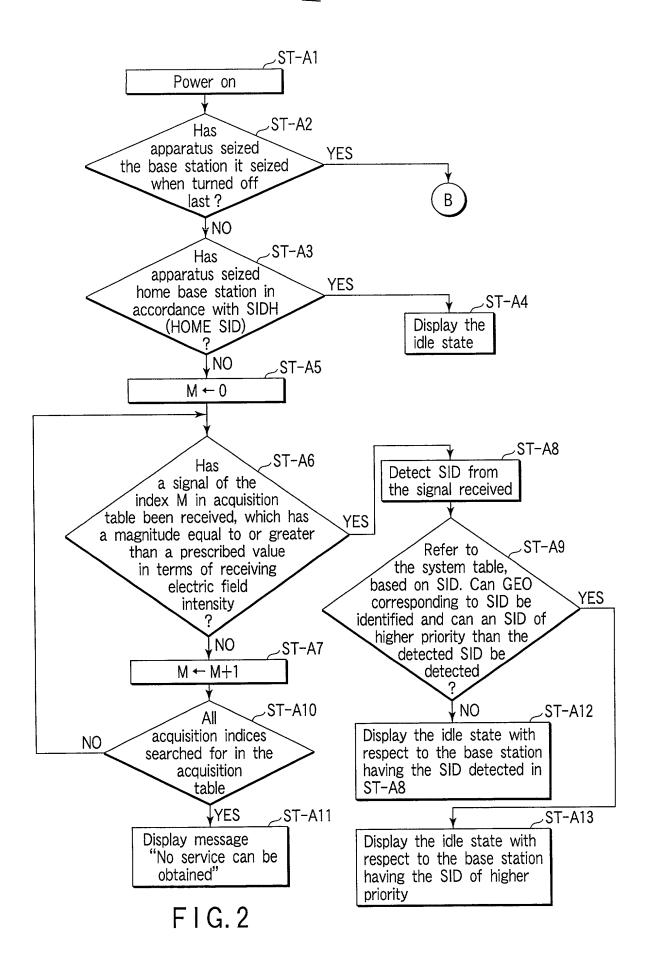


Acquisition table			
Acquisition Index	Scan range		
0	Digital A type (CH=283, 691)		
1	Digital B type (CH=384, 777)		
2	Analog A type (CH=333-313)		
3	Analog B type (CH=333-354)		


FIG.3

System table			
GEO	SID	Priority	Acquisition Index
1	54	1	1
	41	2	0
	4002	3	3
2	189	1	0
	85	2	0
	121	3	0


FIG.4

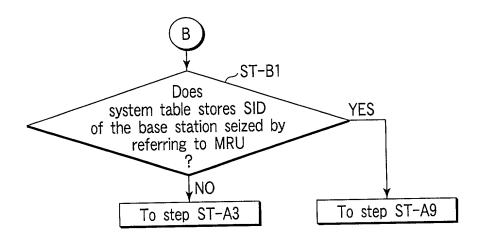


F1G.5

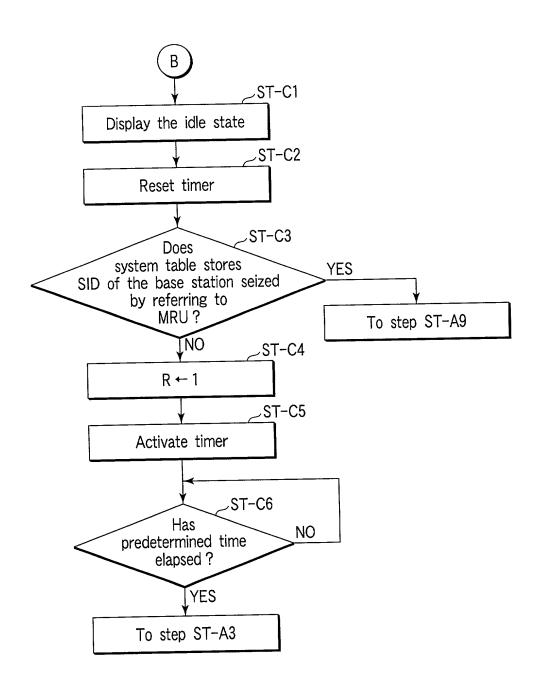

F I G. 6

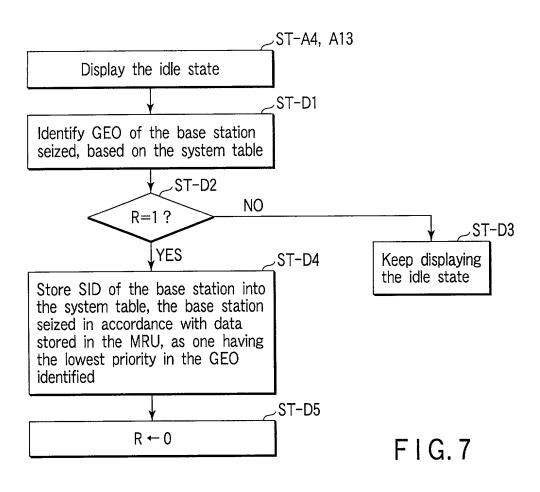

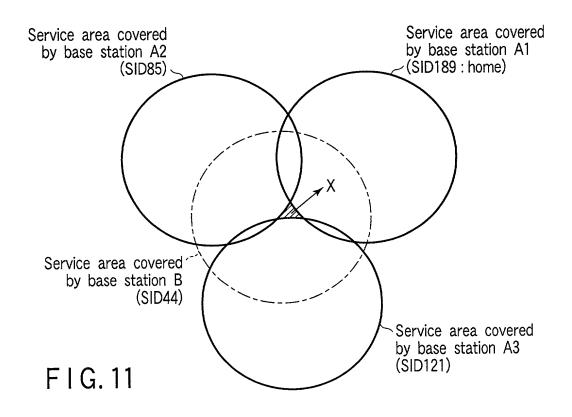


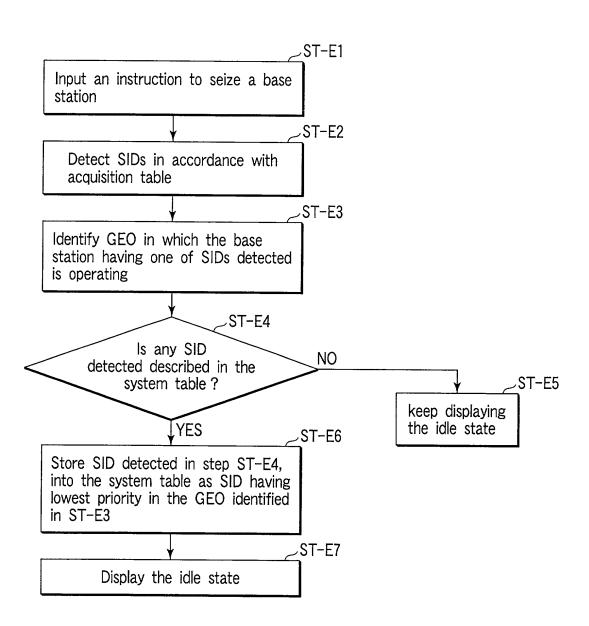


FIG.8

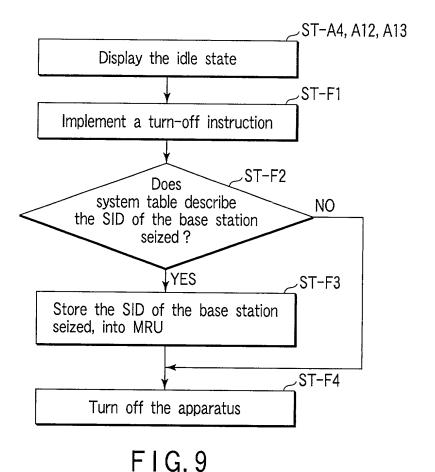

Display the idle state

ST-G1

Implement a turn-off instruction

ST-G2

Store the SID and frequency of the base station seized, into MRU

ST-G3

Turn off the apparatus

FIG. 10